

# PHILIPS

LED Transformers

Datasheet



## LED Transformers

### LED Transformer 150W IP67 24VDC 220-240V

#### Product description

Philips full-electronic constant voltage LED Transformers are designed to operate 24VDC LED solutions used in general applications such as refrigerated display lighting, retail display lighting and linear accent lighting. They are specifically designed to ensure the highest performance with maximum robustness combined with a long lifetime. Additionally, the IP67 range are designed for outdoor environment applications such as signage and flood lighting.

#### Benefits

- SELV operating voltages, ensuring safety even if wiring or LED boards become damaged
- Energy savings through high efficiency
- Ultimate robustness, offering peace of mind and lower maintenance costs
- High thermal and EMC performance, enabling easy design-in
- IP rated housing, allowing for driver gearbox with low IP rating
- Long lifetime

#### Features

- Independent use for Insulation Class I applications
- Global approbations and certifications
- Stabilized output voltage
- Wide ambient temperature range
- Protection against overpower and overvoltage
- Output short-circuit shutdown feature with automatic restart

#### Applications

- Area and flood lighting
- Industry lighting
- Signage lighting

## Electrical input data

Specification item	Value	Unit	Condition
Rated input voltage range	220 ... 240	Vac	Performance
Rated input voltage range	198 ... 264	Vac	Operational safety
Rated input frequency	50 ... 60	Hz	Performance
Rated input frequency	45 ... 66	Hz	Operational safety
Rated input current	0.72	A	230Vac, @ rated output power
Rated input power	165	W	230Vac, @ rated output power
Power factor	0.99		230Vac, @ rated output power.
Total harmonic distortion	8	%	230Vac, @ rated output power.
Efficiency (typ)	91	%	230Vac, @ rated output power.

## Electrical output data


Specification item	Value	Unit	Condition
Regulation method	Constant Voltage		Rated output voltage = 24VDC
Output voltage range	22.8 ... 25.2	Vdc	
Output current range	0.1 ... 6.25	A <sub>dc</sub>	
Output voltage ripple	< 300	mV <sub>pp</sub>	
Rated output power	150	W	
Line regulation	< 3	%	
Load regulation	< 5	%	
Turn-on delay	≤ 1	s	
Output voltage rise time	≤ 50	ms	
Hold-up time	≥ 10	ms	

## Logistical data

Specification item	Value
Product name	LED Transformer 150W IP67 24VDC 220-240V
Order code	694793915922200
Logistic code 12NC	9290 014 85580
Pieces per box	6

## Wiring & Connections

Specification item	Value	Unit	Condition
Input wire cross-section	1.0	mm <sup>2</sup>	Stranded wires
Input cable diameter	8	mm	
Input wire strip length	8 ... 10	mm	
Output wire cross-section	1.0	mm <sup>2</sup>	Stranded wires
Output cable diameter	7	mm	
Output wire strip length	8 ... 10	mm	
Maximum output cable length	1.0	m	CISPR15: between driver and LED module

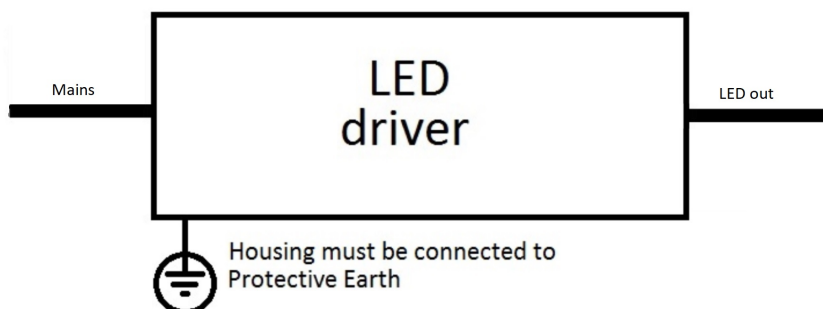


## Insulation

Insulation	Mains	LED	Housing
Mains		SELV (double)	Basic
LED	SELV (double)		Basic
Housing	Basic	Basic	

## Dimensions and weight

Specification item	Value	Unit	Condition
Length (A1)	250	mm	
Length (A3)	232	mm	
Width (B1)	68	mm	
Width (B2)	50	mm	
Fixing hole distance (A2)	238	mm	Fixing hole diameter: 4.2 mm
Fixing hole distance (B3)	34	mm	
Height (C1)	45	mm	
Input cable D1	300	mm	
Output cable D2	300	mm	
Wire length E1	60	mm	
Wire length E2	60	mm	
Weight	1010	gram	

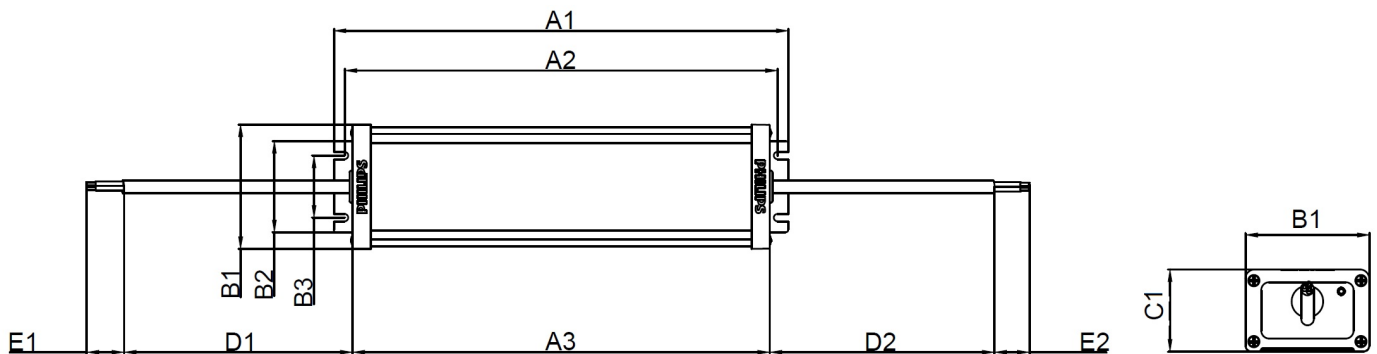

## Operational temperatures and humidity

Specification item	Value	Unit	Condition
Driver ambient temperature	-40 ... +55	°C	At rated output power. Higher ambient temperature allowed as long as Tcase-max is not exceeded.
Tcase-min	-40	°C	
Tcase-max	+90	°C	Max. steady-state Tcase
Tcase-life	-40 ... +80	°C	For rated driver lifetime
Maximum housing temperature	110	°C	In case of failure
Relative humidity	10 ... 90	%	Non-condensing
Ingress Protection *	IP67		
Noise and hum	≤ 24	dB	

\*: The LED Transformer is primarily intended for independent use. It must not be exposed including but not limited to snow, water and ice or any other chemical agent which may have an adverse affect on driver operation and performance. Exposure may lead to driver failure. It is the luminaire manufacturer's / installer's responsibility to prevent exposure.

## Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-40 ... +80	°C	
Relative humidity	5 ... 95	%	Non-condensing

## Lifetime

Specification item	Value	Unit	Condition
Rated driver lifetime	50,000	hours	$T_{case} \leq T_{case-life}$ . Maximum failures = 10%. See graph.

## Features


Specification item	Value	Remark	Condition
Open load protection	Yes		$U_{out}$ (open circuit) = 25.2V max.
Short-circuit protection	Yes		Hiccup mode, automatic recovering
Overpower protection	Yes		Automatic recovering
Overheating protection	Yes		Automatic recovering, see ThermalGuard graph
Hot wiring	Yes		
Suitable insulation class applications	I		Per IEC60598

## Certificates and standards

Specification item	Value
Approval marks	CE / ENEC / CB / F / CCC / RCM / IP67 / SELV / Double-insulated / Independent

## Inrush current

Specification item	Value	Unit	Condition
Inrush current $I_{peak}$ (typ)	38	A	Input voltage 240Vac
Inrush current $T_{width}$ (typ)	600	$\mu s$	Input voltage 240Vac, measured at 50% $I_{peak}$
Max. recommended number of drivers	4	pcs	MCB 16A B type, mains impedance 200m $\Omega$ + 400 $\mu H$

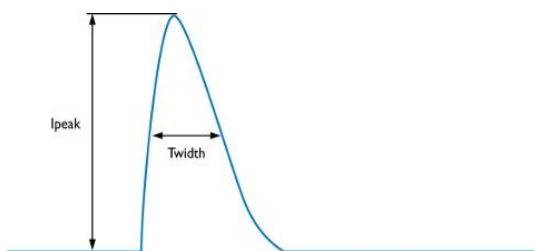

MCB	Rating	Relative number of drivers *
B	6A	37%
B	10A	63%
B	13A	81%
B	16A	<b>100%</b>
B	20A	125%
B	25A	156%
C	6A	63%
C	10A	104%
C	13A	135%
C	16A	170%
C	20A	208%
C	25A	260%
D	6A	125%
D	10A	104%
D	13A	135%
D	16A	170%
D	20A	208%

\* : please check that cable cross sectional area corresponds with MCB rating and type

## Surge immunity


Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	6/ 3	kV / kA	L-N, acc. IEC61000-4-5. 2 Ohm, 1.2/50 $\mu s$ , 8/20 $\mu s$
Mains surge immunity (comm. mode)	6	kV	L/N - GND, acc. IEC61000-4-5. 2 Ohm, 1.2/50 $\mu s$ , 8/20 $\mu s$

## Driver protective conductor current

Specification item	Value	Unit	Condition
Typical protective conductor current (ins. Class I)	0.17	mA rms	Acc. IEC61347-1. LED module contribution not included


## Power factor versus output power

---

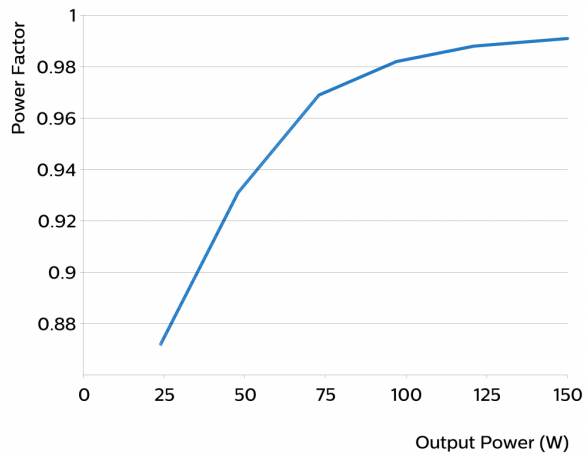


## Efficiency versus output power

---

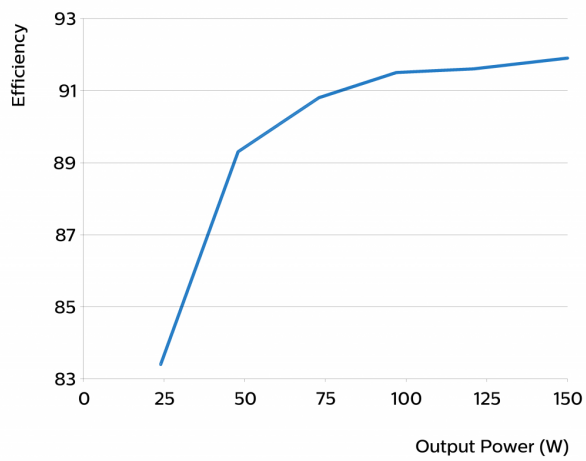


## THD versus output power


---

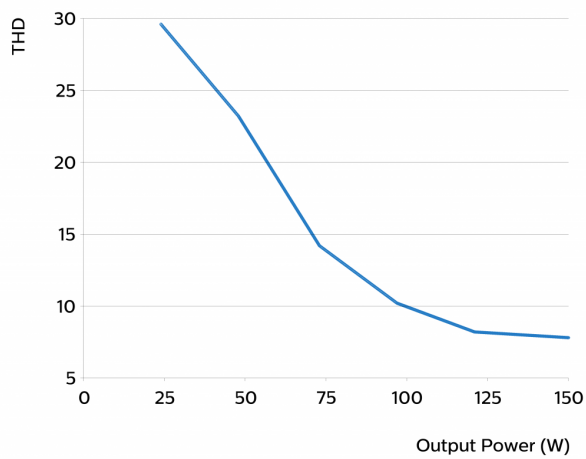

## Driver lifetime versus Tc temperature

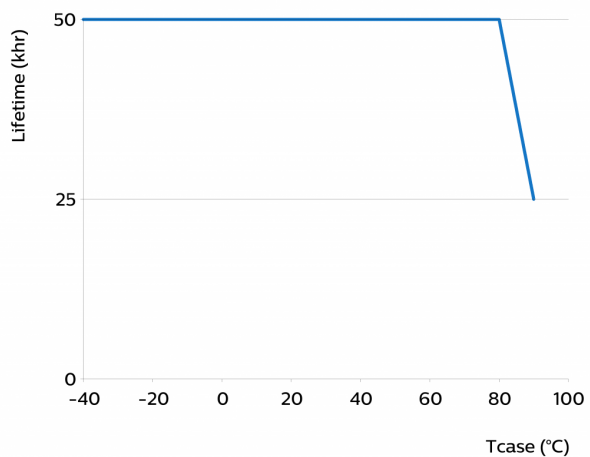

## Thermal Guard

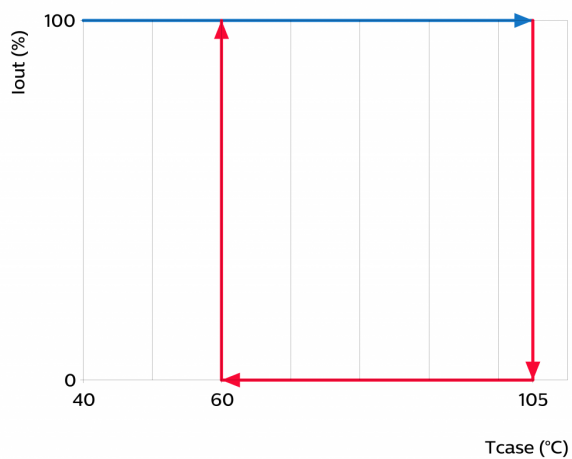

©2019 Signify Holding, IBRS 10461, 5600 VB, NL. All rights reserved.

The information provided herein is subject to change without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Date of release: January 31, 2019

[www.philips.com/oem](http://www.philips.com/oem)