

# PHILIPS

## CertaDrive

### LED driver



## Datasheet

### CertaDrive G3

CertaDrive 30W 0.7A 42V | 230V

9290 028 19480

#### Affordable and reliable LED Drivers

Affordable LED Driver range offering Philips reliability. The CertaDrive range is compatible with COB and mid-power LEDs from any LED manufacturer.

#### Benefits

- Design based on Philips experience and knowledge of lighting
- Various power wattage drivers for different applications
- Independent housing design for stand-alone installations
- Affordable LED Drivers with premium brand

#### Features

- High reliability design proved by G1/G2
- Great EMI performance suitable for different luminaire
- Low ripple current less than 4%
- 30,000 hours lifetime

#### Application

- Public buildings (airports, cinemas, theaters, exhibition halls)
- Retail (supermarkets, shops)
- Office

## Electrical input data

| Specification item          | Value     | Unit            | Condition                                  |
|-----------------------------|-----------|-----------------|--|
| Rated input voltage range   | 220...240 | V <sub>ac</sub> | Performance range                          |
| Rated input voltage         | 230       | V <sub>ac</sub> |  |
| Rated input frequency range | 50...60   | Hz              | Performance range                          |
| Rated input current         | 0.16      | A               | @ rated output power @ rated input voltage |
| Rated input power           | 33.6      | W               | @ rated output power @ rated input voltage |
| Power factor                | 0.9       |                 | @ rated output power @ rated input voltage |
| Total harmonic distortion   | 20        | %               | @ rated output power @ rated input voltage |
| Efficiency                  | ≥ 87      | %               | @ rated output power @ rated input voltage |
| Input voltage AC range      | 202...254 | V <sub>ac</sub> | Operational range                          |
| Input frequency AC range    | 47.5...63 | Hz              | Operational range                          |
| Isolation input to output   | SELV      |                 |  |

## Electrical output data


| Specification item       | Value            | Unit            | Condition                       |
|--------------------------|------------------|-----------------|---------------------------------|
| Regulation method        | Constant Current |                 |                                 |
| Output voltage           | 30...42          | V <sub>dc</sub> |                                 |
| Output voltage max.      | 60               | V               | Maximum output voltage (rms)    |
| Output current           | 0.7              | A               |                                 |
| Output current tolerance | ± 8              | %               |                                 |
| Output current ripple LF | < 4              | %               | Ripple = peak / average, < 3kHz |
| Output power             | 21...30          | W               |                                 |

## Electrical data controls input

| Specification item                 | Value | Unit | Condition       |
|------------------------------------|-------|------|-----------------|
| Control method                     |       |      |                 |
| Isolation controls input to output | NA    |      | acc. IEC61347-1 |


## Wiring and Connections

| Specification item        | Value      | Unit            | Condition  |
|---------------------------|------------|-----------------|--|
| Input wire cross-section  | 0.75...1.5 | mm <sup>2</sup> | Type250 (Independent), solid / stranded wire         |
|                           | 18...16    | AWG             | Type250 (Independent), solid / stranded wire         |
| Input wire strip length   | 8...9      | mm              |  |
| Output wire cross-section | 0.75...1.5 | mm <sup>2</sup> | Type250 (Independent), solid / stranded wire         |
|                           | 18...16    | AWG             | Type250 (Independent), solid / stranded wire         |
| Output wire strip length  | 8...9      | mm              |  |
| Maximum cable length      | 0.6        | m               | Total length of wiring including LED module, one way |

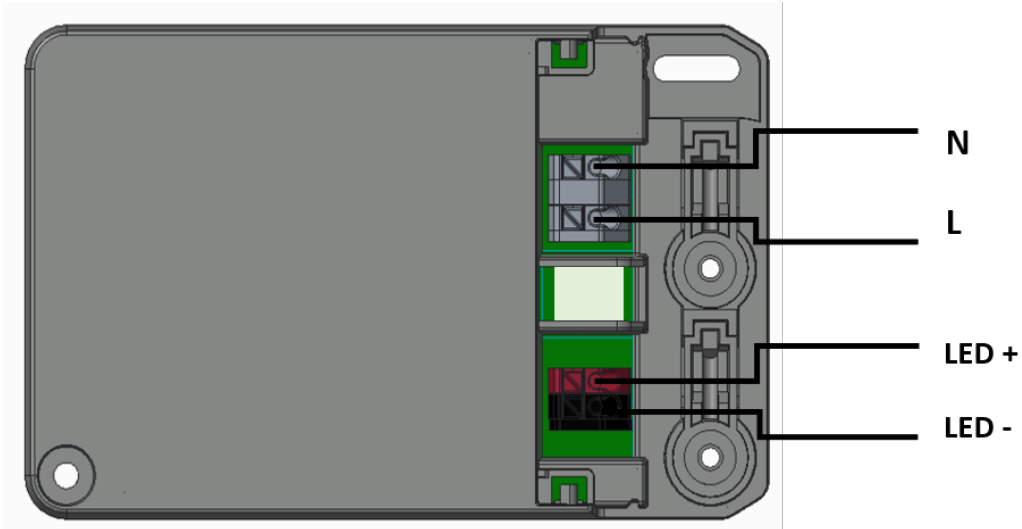

## Dimensions and weight

| Specification item          | Value | Unit | Condition |
|-----------------------------|-------|------|-----------|
| Length (A1)                 | 108   | mm   |           |
| Mounting hole distance (A2) | 91.5  | mm   |           |
| Width (B1)                  | 68    | mm   |           |
| Width (B2)                  | 56    | mm   |           |
| Height (C1)                 | 32    | mm   |           |
| Mounting hole diameter (D1) | 3.6   | mm   |           |
| Weight                      | 122   | gram |           |

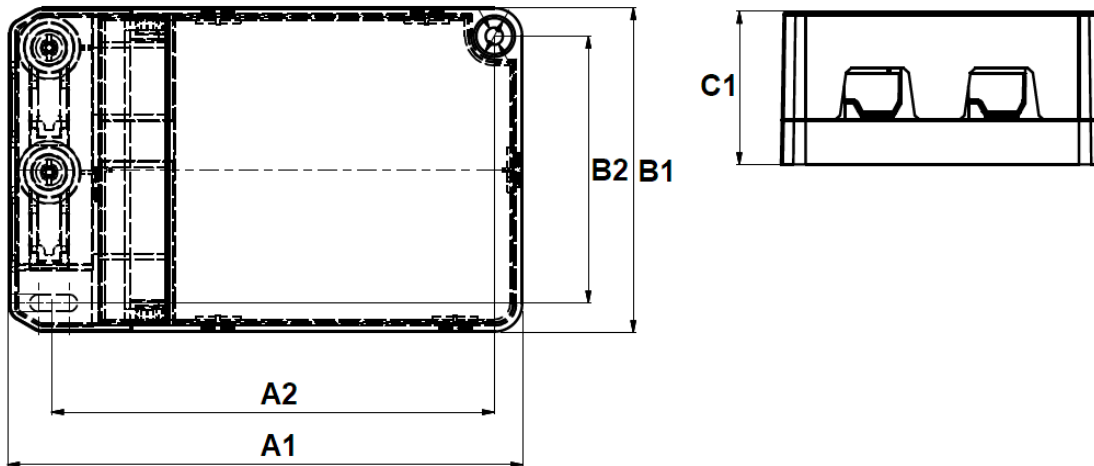

## Logistical data


| Specification item | Value                          |
|--------------------|--------------------------------|
| Product name       | CertaDrive 30W 0.7A 42V I 230V |
| Logistic code 12NC | 9290 028 19480                 |
| Pieces per box     | 40                             |

## Operational temperatures and humidity

| Specification item          | Value     | Unit | Condition   |
|-----------------------------|-----------|------|---|
| Ambient temperature         | -20...+50 | °C   | Higher ambient temperature allowed as long as T <sub>case-max</sub> is not exceeded |
| T <sub>case-max</sub>       | 80        | °C   | Maximum temperature measured at T <sub>case</sub> -point                            |
| T <sub>case-life</sub>      | 70        | °C   | Measured at T <sub>case</sub> -point  |
| Maximum housing temperature | 130       | °C   | In case of a failure, inherent by design  |
| Relative humidity           | 10...90   | %    | Non-condensing  |

## Lifetime

| Specification item | Value  | Unit  | Condition   |
|--------------------|--------|-------|---|
| Driver lifetime    | 30,000 | hours | Measured temperature at Tcase-point is Tcase-life. Maximum failures = 10% |

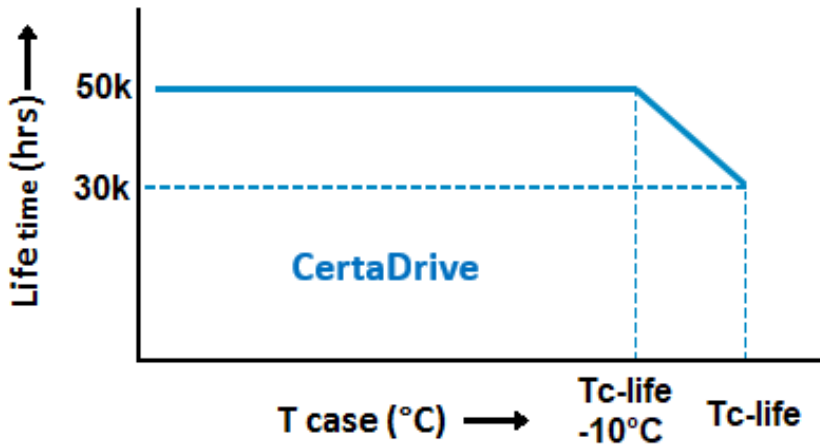

## Storage temperature and humidity

| Specification item  | Value     | Unit | Condition      |
|---------------------|-----------|------|----------------|
| Ambient temperature | -25...+85 | °C   |                |
| Relative humidity   | 5...95    | %    | Non-condensing |

## Programmable features


| Specification item                      | Available | Default setting | Condition |
|---|-----------|-----------------|-----------|
| Set Adjustable Output Current (AOC)     |           | 700 mA          |           |
| LED Module Temperature Protection (MTP) | No        |                 |           |
| Constant Lumen Over Lifetime (CLO)      | No        |                 |           |
| DC emergency dimming (DCemDim)          | No        |                 |           |

## Features

| Specification item                          | Value    | Remark | Condition            |
|---|----------|--------|----------------------|
| Open load protection                        | Yes      |        | Automatic recovering |
| Short circuit protection                    | Yes      |        | Automatic recovering |
| Over power protection                       | Yes      |        | Automatic recovering |
| Hot wiring                                  | No       |        |                      |
| Suitable for fixtures with protection class | I and II |        | per IEC60598         |

## Inrush current

| Specification item         | Value     | Unit    | Condition                                      |
|----------------------------|-----------|---------|--|
| Inrush current $I_{peak}$  | 19.5      | A       | Input voltage 230V                             |
| Inrush current $T_{width}$ | 258       | $\mu$ s | Input voltage 230V, measured at 50% $I_{peak}$ |
| Drivers / MCB 16A type B   | $\leq 40$ | pcs     | Indicative value                               |

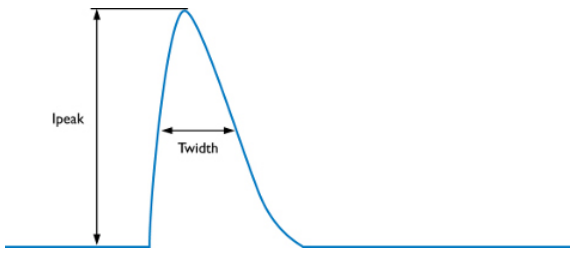

| MCB | Rating | Relative number of LED drivers |
|-----|--------|--------------------------------|
| B   | 4A     | 25%                            |
| B   | 6A     | 40%                            |
| B   | 10A    | 63%                            |
| B   | 13A    | 81%                            |
| B   | 16A    | 100% (stated in datasheet)     |
| B   | 20A    | 125%                           |
| B   | 25A    | 156%                           |
| B   | 32A    | 200%                           |
| B   | 40A    | 250%                           |
| C   | 4A     | 42%                            |
| C   | 6A     | 63%                            |
| C   | 10A    | 104%                           |
| C   | 13A    | 135%                           |
| C   | 16A    | 170%                           |
| C   | 20A    | 208%                           |
| C   | 25A    | 260%                           |
| C   | 32A    | 340%                           |
| C   | 40A    | 415%                           |

## Driver touch current / protective conductor current

| Specification item                    | Value | Unit    | Condition   |
|---------------------------------------|-------|---------|---|
| Typical Touch Current (ins. Class II) | 0.7   | mA peak | Acc. IEC61347-1. LED module contribution not included |

## Surge immunity

| Specification item                | Value | Unit | Condition                                  |
|-----------------------------------|-------|------|--|
| Mains surge immunity (diff. mode) | 1     | kV   | Acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us |
| Mains surge immunity (comm. mode) | 2     | kV   | Acc. IEC61000-4-5. 12 Ohm 1.2/50us,8/20us  |


## Application Info

| Specification item                     | Value                                  |
|--|--|
| Approval marks                         | CB / CCC / CE / ENEC / KC / RCM / TISI |
| Ingress Protection classification (IP) | 20                                     |

## Graphs


### Operating window

---

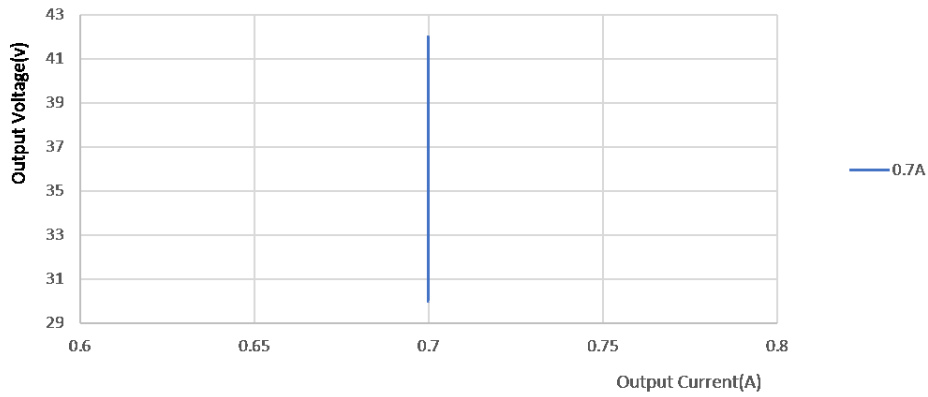


### Power factor versus output power

---

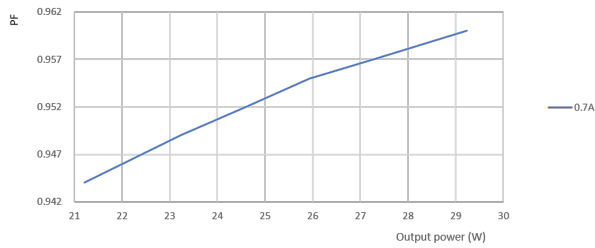


### Efficiency versus output power

---

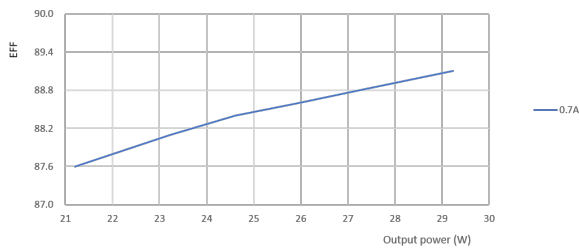

### THD versus output power

---

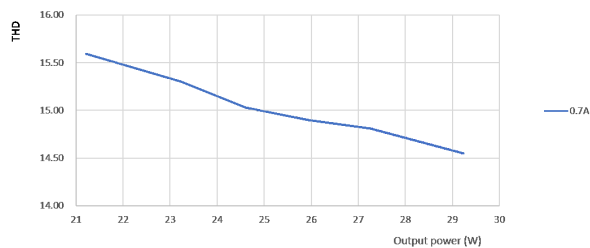



©2020 Signify Holding, IBRS 10461, 5600 VB, NL. All rights reserved.

The information provided herein is subject to change without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Date of release: April 27, 2020 v3

[www.philips.com/oem](http://www.philips.com/oem)